

**5.0T**  
Lifting Capacity


**2130MM**  
Full Travel

**25S**  
Full-Rise Time



**8 DIRECTIONS**  
Play Detector



## OVERALL DIMENSION

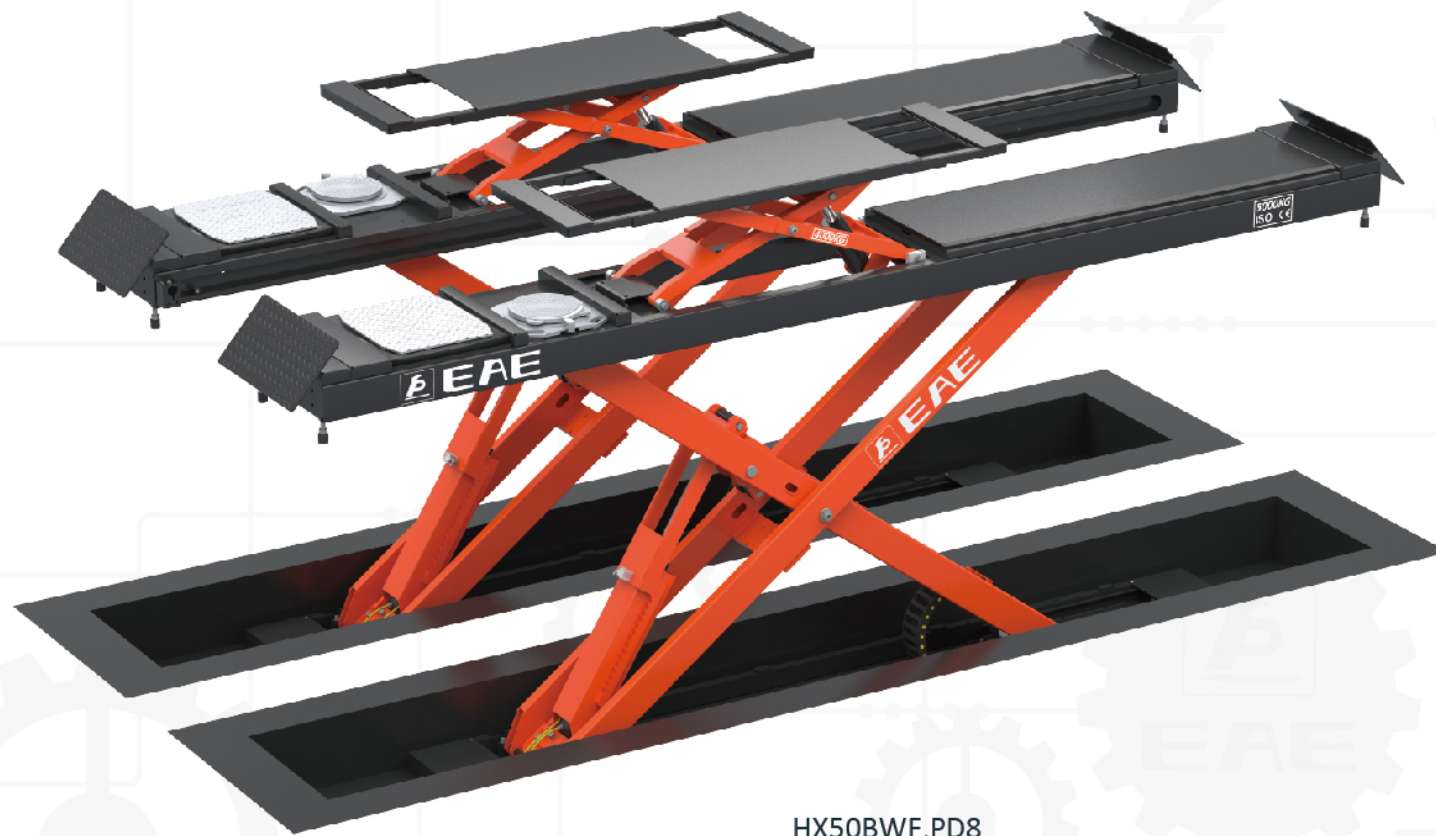


HX50BWF.PD8

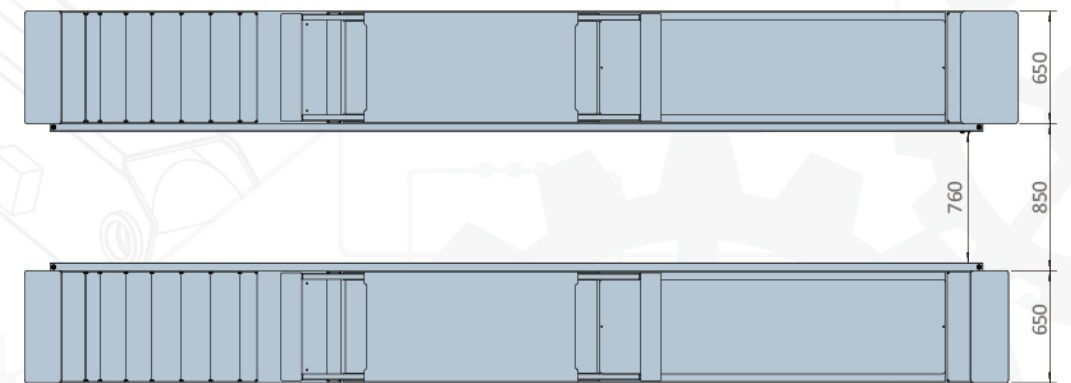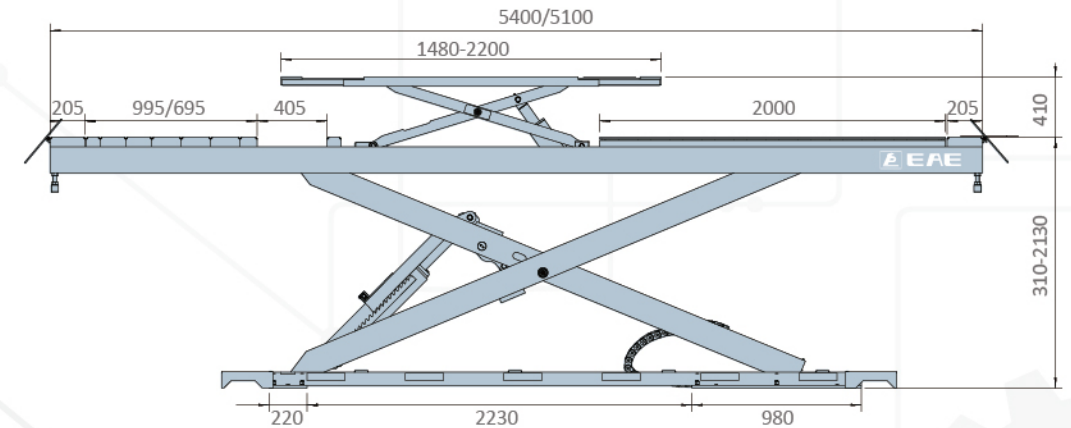

B Platforms with front recesses and rear slip plates

BWF Platforms with front recesses, rear slip plates, and wheel free lifts

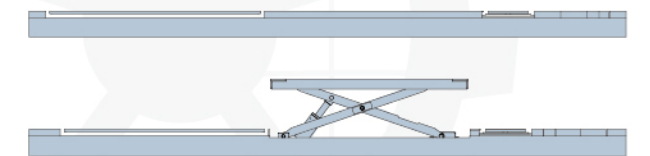

## HX50

### ALIGNMENT SCISSOR LIFT

- Maximum lifting height 1820mm above floor.
- Available in two main platform lengths (5400mm / 5100mm) to suit different workshop spaces and vehicle types.
- Infrared synchronization protection system.
- The most of vehicles can be lifted by the Wheel-free Lifting Platform, which loads up to 4.0T and extends up to 2200mm.
- Only 25 seconds for raising to shorten your service time.
- Flexible positions for turning plates. Accurate wheel-alignment is efficiently done using its pneumatic-controlled slip plates together with the radius turning plates.
- Easy one-touch pneumatic locking and release of slip plates, eliminating manual handling for technicians.
- Four portable LED lamps attached magnetically by the platform to provide sufficient light under vehicles.
- Standard runway rails accept optional jacking beams.
- Optional Play Detector, with its longitudinal and transversal movement being as much as 100 mm, is made as per the DIRECTIVE 2014/45/EU.


## TECHNICAL DATA

| MODEL NO.           | HX50                        |
|---------------------|-----------------------------|
| Lifting capacity    | 5.0T                        |
| Max. lifting height | 2130mm(1820mm above floor)  |
| Min. height         | 310mm                       |
| Lifting time        | Approx. 25S                 |
| Motor               | 3.5kWx2/3ph                 |
| Air supply          | 6-8bar                      |
| Platform width      | 650mm                       |
| Electricity supply  | According To Customer Needs |


\* Machine shown with optional equipment. Actual product appearance may differ.




Low Voltage Control Unit



Pneumatic Rear Side Slip




PD8 (Optional)



Infrared synchronization protection system



Pneumatic Release Mechanical Lock



Wheel Free Lift