


3.5T/4.2T
Lifting Capacity

Simply Pull Down One Handle
For Lowering



OVERALL DIMENSION

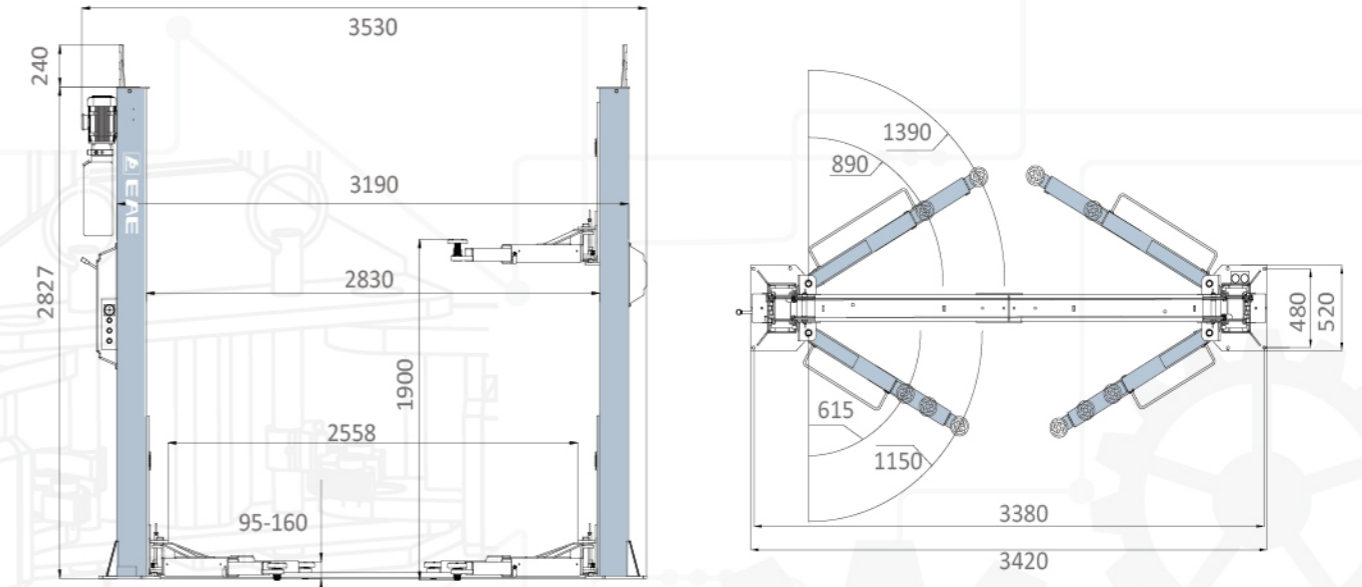

F9M/F10M

TECHNICAL DATA

MODEL NO.	F9M/F10M
Lifting capacity	3.5T/4.2T
Max. lifting height	1900mm
Min. height	95mm-160mm
Lifting time	Approx.55S
Capacity of motor	2.2kW
Overall Height	2827mm+240mm
Drive through width	2558mm
CE certification	✓
Electricity supply	According To Customer Needs

* Max. Lifting height is measured with adjustable screw pads at highest position.
* Machine shown with optional equipment. Actual product appearance may differ.




F9M/F10M

ONE HAND OPERATION TWO POST LIFT

- Simply push one button to engage the mechanical safety locking unit.
- Durable cylinders in each column with anti-surge valves.
- Standard door protection pads to prevent possible damage to the door opened without caution.
- Pre-fixed hydraulic pressure prevents overloading operation.
- Standard column curtain.
- 24V safe control system.
- 3-stage short arm and 2-stage long arm.



Handle for Release & Descent



Strong Carriage and Arm Structure



Aluminum Motor



Round Screw-up Lifting Pad



3-Stage Short Arm And 2-Stage Long Arm

