

3.5T/4.2T
Lifting Capacity

Simply Pull Down One Handle
For Lowering



C9M/C10M




C9M/C10M



ONE HAND OPERATION TWO POST LIFT

- Clear floor design for easy movement of maintenance equipment under the raised vehicle.
- Simply push one button for lowering.
- Cylinder straight top device, run more smoothly.
- The arm locks engage and disengage automatically.
- Users' safety is double guaranteed by using both mechanical latches and restrictive valves.
- Durable cylinders in each column with anti-surge valves.
- With vehicle roof protection. The power system switches off when vehicle roof touches the rubber protected overhead bar.
- Pre-fixed hydraulic pressure prevents overloading operation.
- Standard column curtain.
- 24V safe control system.
- 3-stage short arm and 2-stage long arm.


OVERALL DIMENSION

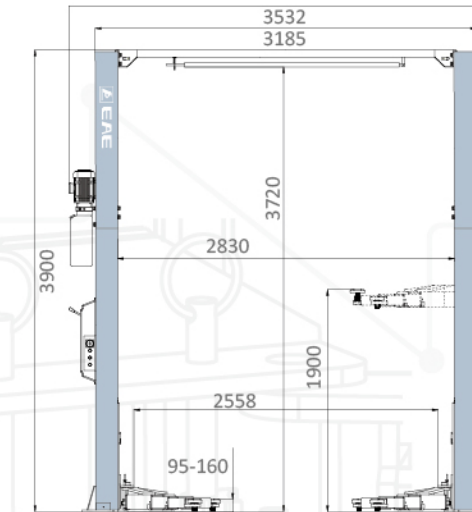

C9M

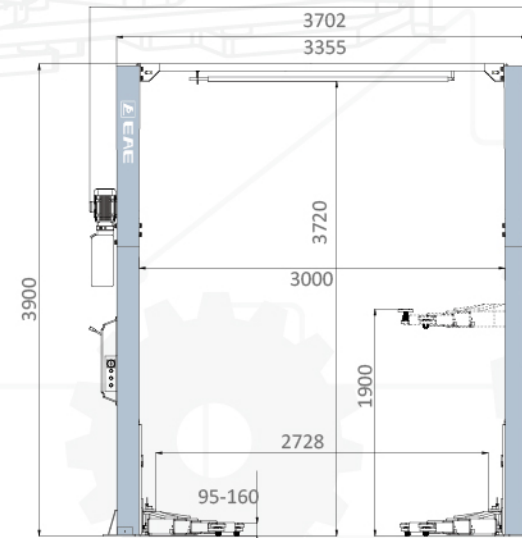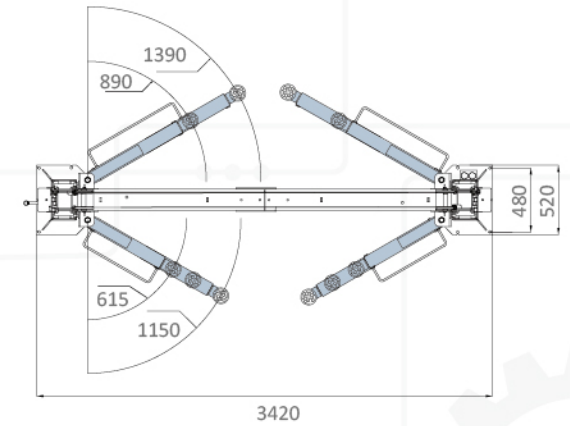

C10M

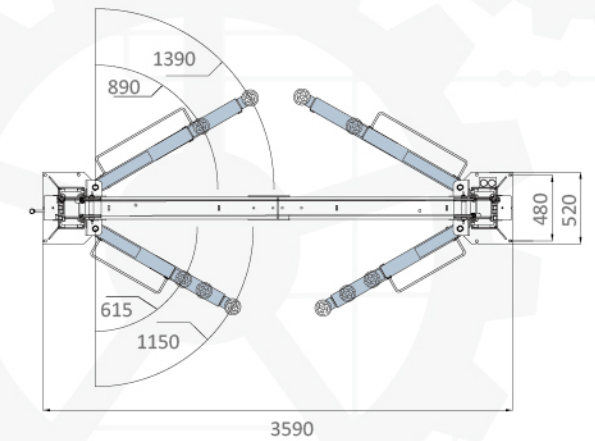


TECHNICAL DATA

MODEL NO.	C9M	C10M
Lifting capacity	3.5T	4.2T
Max. lifting height	1900mm	1900mm
Min. height	95mm-160mm	95mm-160mm
Lifting time	Approx.55S	Approx.55S
Motor	2.2kW	2.2kW
Drive-through width	2558mm	2728mm
Overall width	3420mm	3590mm
Inside Column	2830mm	3000mm
Electricity supply	According To Customer Needs	

* Max. Lifting height is measured with adjustable screw pads at highest position.
* Machine shown with optional equipment. Actual product appearance may differ.



Handle for Release & Descent



Strong Carriage and Arm Structure



Easier for making both sides work synchronously



Aluminum Motor



3-Stage Short Arm And 2-Stage Long Arm