


5.0T
Max. Capacity

3000MM
Between Columns for 3D Aligning

Wheel Free Lift
Standard 4.0T **CE**



OVERALL DIMENSION

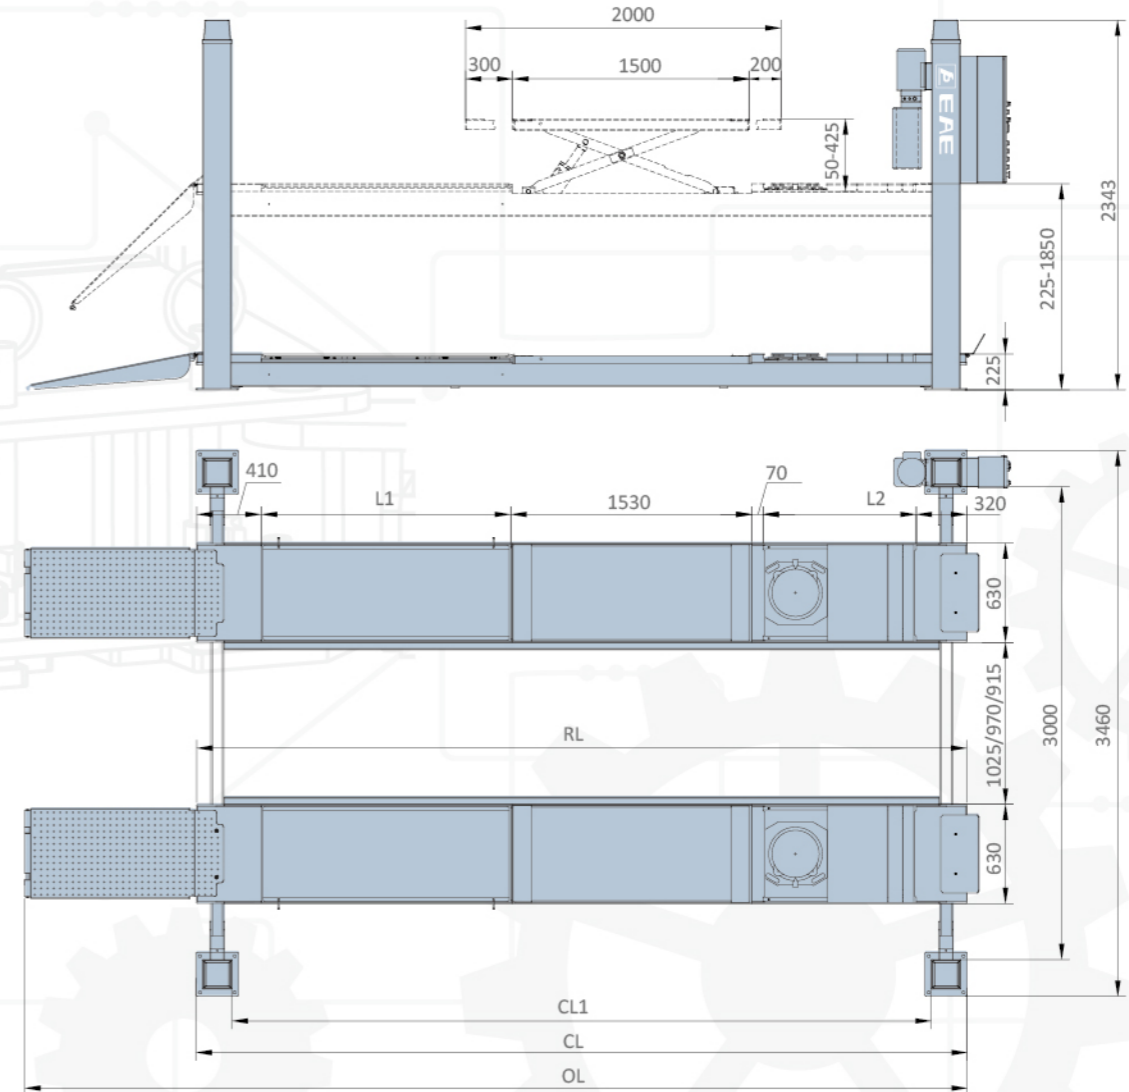

FOUR POST LIFT



6435BWF

FOUR POST LIFT


- 4.0T/5.0T lifting capacity.
- Built-in wheel free jack has a max capacity of 4000kg and is extendable in length.
- Long slip plate and adjustable turntable positions accommodate different kinds of wheelbases.
- Electrical release, just press UP and DOWN button to control the lift.
- Wide platforms for easier driving on and off.
- 3000mm distance between two columns compatible to 3D wheel aligner.
- The great planeness of runways is perfect for high accurate wheel aligning.
- Driving-on ramps with polymer rollers.
- Reserved tracks on platforms fit for optional rolling jacks.
- Low profile runway allows the vehicles drive on and off conveniently.
- 24V safe control system.
- Solid and robust cable pulleys.
- Self-lubricated bushing and bearing.
- Platforms non-synchronization alarming system.
- Safety device works immediately in case a rope slacks or fails.
- Alarm buzzer for safe descending.
- Aluminum motor with fan on top to avoid overheating caused by long time working.

TECHNICAL DATA

Model No.	Lifting capacity	Max. lifting height	L1	L2	RL	CL1	CL	OL
6435BWF-48L	4.0T/5.0T	1850	1580	970	4880	4438	4888	5970
6435BWF-52L			1980			4838	5288	6370
6435BWF-57L	5.0T		2280	1170	5780	5338	5788	6870



Motor Housing



Slip Plate



Wheel Free Jack (4000kg)



Oil Hose Protection



Solid and Robust Cable Pulleys

