15T Lifting Capacity Long Runways of Each Platform


8000MM

Digital Data






### **OVERALL DIMENSION**

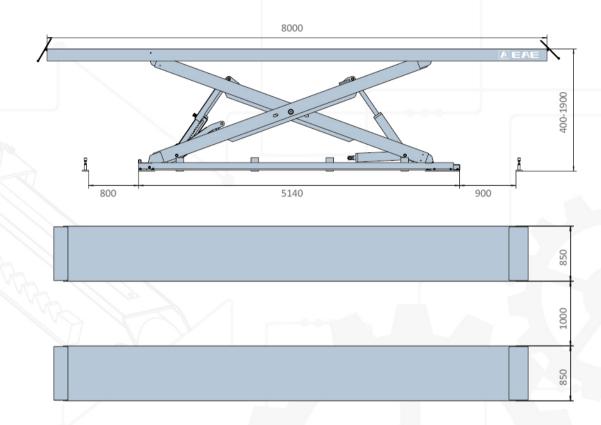

## TECHNICAL DATA

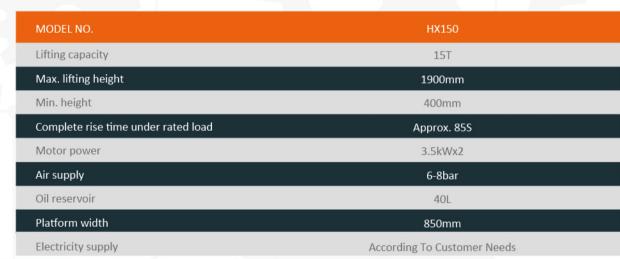

\* Machine shown with optional equipment. Actual product appearance may differ.

Constantly feed back the height and working status of each platform through visual monitor.



Limit switch to ensure the cylinders work within its maximal stroke.



4-cylinder synchronizing structure



# **HX150**

## **HEAVY DUTY SCISSOR LIFT**

- Hydraulic synchronization by four cylinders. The mechanical safety locking unit automatically releases before descending.
- Safe low control voltage (24V) for all control buttons and switches.
- Constantly read the height and working status of each platform through visual monitor.
- CLOSED-LOOP control system, the two platforms automatically align with each other during every rising and lowering cycles. In normal working, the height deviation is limited within 20mm.
- The lifting system stops working in case that the height deviation exceeds
- At most 6 platforms can work together synchronously.

67