



3.5T/4.2T
Lifting CapacitySimply Pull Down One Handle
For Lowering

F9M/F10M

ONE HAND OPERATION TWO POST LIFT

- Simply push one button to engage the mechanical safety locking unit.
- Durable cylinders in each column with anti-surge valves.
- Standard door protection pads to prevent possible damage to the door opened without caution.
- Pre-fixed hydraulic pressure prevents overloading operation.
- Standard column curtain.
- 24V safe control system.
- 3-stage short arm and 2-stage long arm.

OVERALL DIMENSION

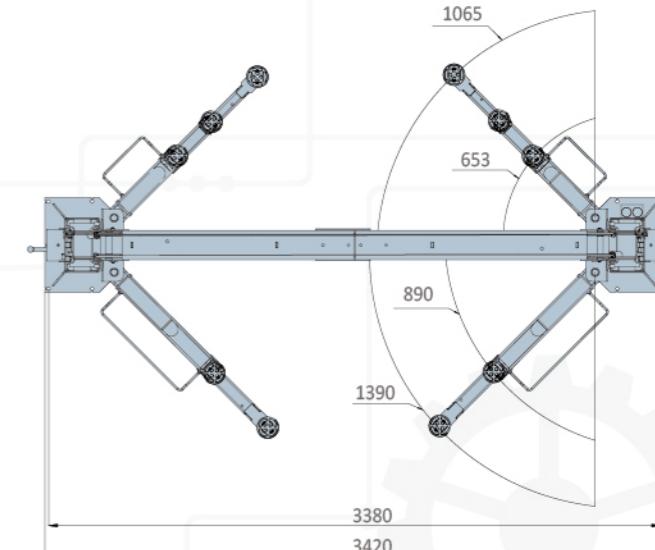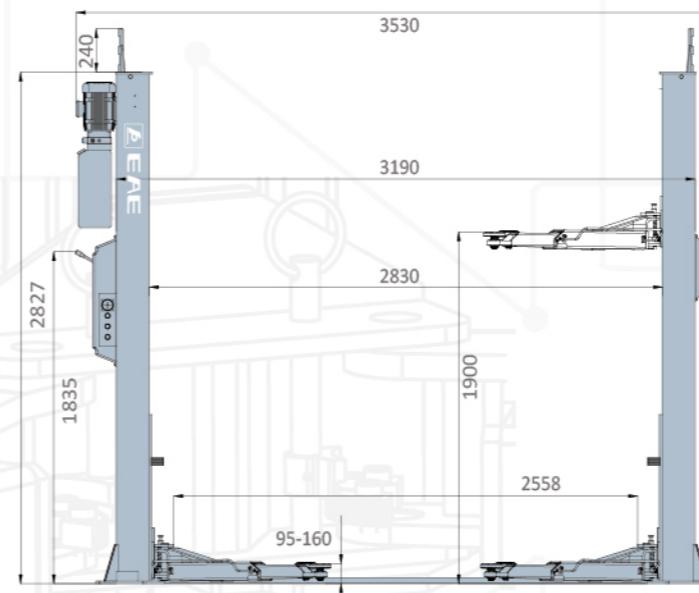

F9M/F10M

TECHNICAL DATA

| MODEL NO. | F9M/F10M |
|---------------------|-----------------------------|
| Lifting capacity | 3.5T/4.2T |
| Max. lifting height | 1900mm |
| Min. height | 95mm-160mm |
| Lifting time | Approx.55S |
| Capacity of motor | 2.2kW |
| Overall Height | 2827mm+240mm |
| Drive through width | 2558mm |
| CE certification | ✓ |
| Electricity supply | According To Customer Needs |

* Maximum lifting height is measured with threaded adapters fully extended.

* Depicted configuration includes optional equipment; actual product may vary.

