

3.5T/4.2T
Lifting Capacity

Simply Pull Down One Handle
For Lowering



C9M/C10M




C9M/C10M



SINGLE-SIDE MANUAL RELEASE TWO-POST LIFT

- Clear floor design for easy movement of maintenance equipment under the raised vehicle.
- Two-position adjustable height: 3600mm/3900mm. No extra parts are required for adjustment.
- One-handle lowering control.
- Chain-free, direct cylinder drive minimizes wear parts, lowering maintenance costs.
- The arm locks engage and disengage automatically.
- Users' safety is double guaranteed by using both mechanical latches and restrictive valves.
- Durable cylinders in each column with anti-surge valves.
- With vehicle roof protection. The power system switches off when vehicle roof touches the rubber protected overhead bar.
- Pre-fixed hydraulic pressure prevents overloading operation.
- Standard column curtain.
- 24V safe control system.
- 3-stage short arm and 2-stage long arm.


OVERALL DIMENSION

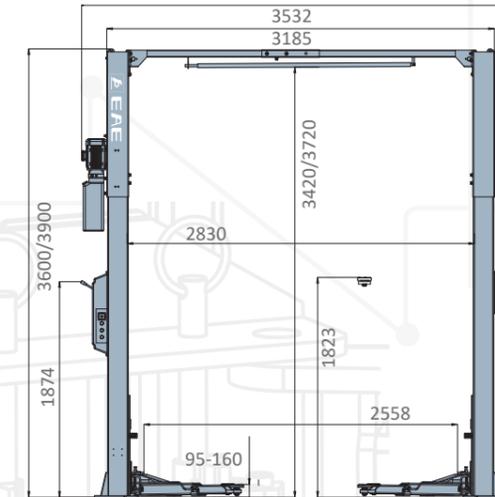

C9M

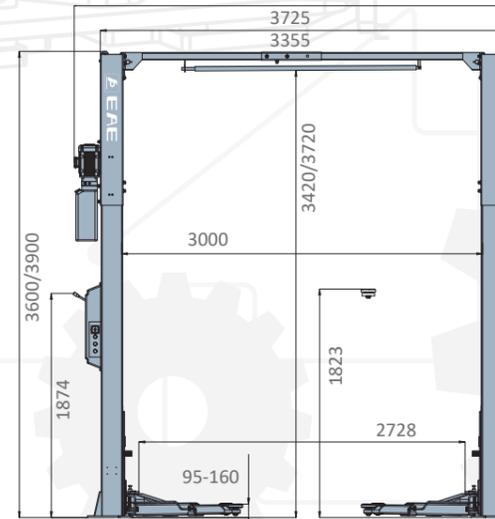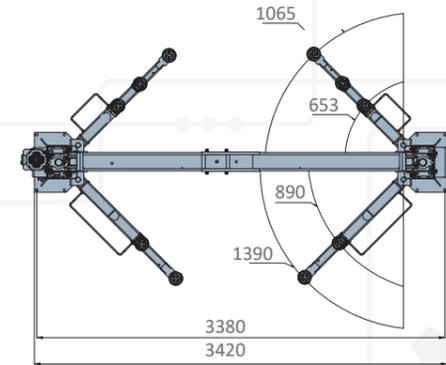

C10M

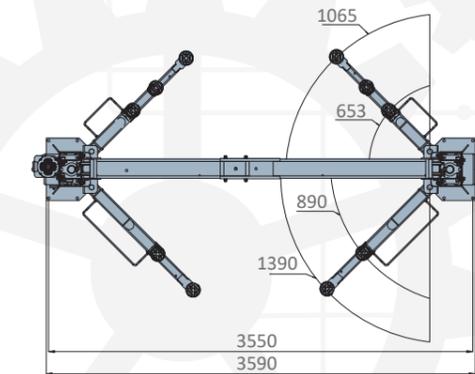

TECHNICAL DATA

MODEL NO.	C9M	C10M
Lifting capacity	3.5T	4.2T
Max. lifting height	1823mm	1823mm
Min. height	95mm-160mm	95mm-160mm
Lifting time	Approx.55S	Approx.55S
Motor	2.2kW	2.2kW
Drive-through width	2558mm	2728mm
Overall width	3420mm	3590mm
Inside Column	2830mm	3000mm
Electricity supply	According To Customer Needs	

* Maximum lifting height is measured with threaded adapters fully extended.
* Depicted configuration includes optional equipment; actual product may vary.



Handle for Release & Descent



Strong Carriage and Arm Structure



Easier for making both sides work synchronously



Aluminum Motor



3-Stage Short Arm And 2-Stage Long Arm