


6.0T Lifting Capacity | 5424MM Long Platform | All Versions S, B, BWF Platforms | **CE**




Optional ramps for on-ground installation

OVERALL DIMENSION

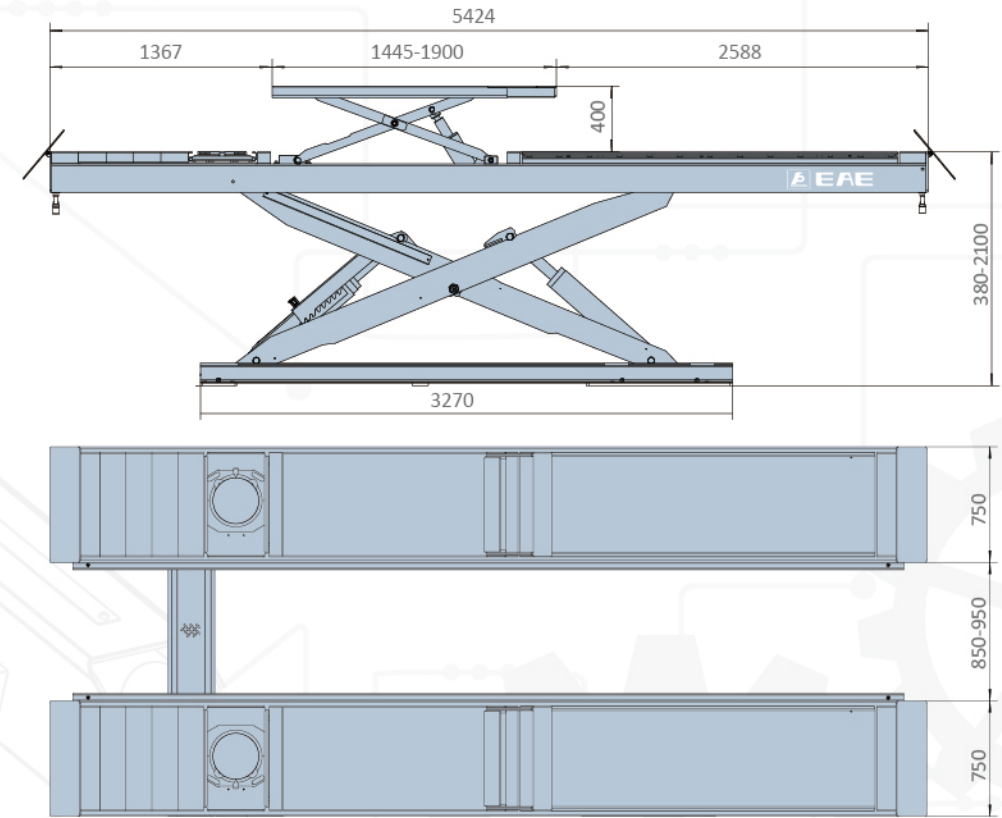

- S Flat platforms
- B Platforms with front recesses and rear slip plates
- BWF Platforms with front recesses, rear slip plates, and wheel free lifts

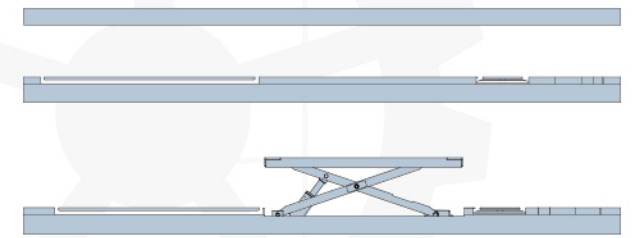

TECHNICAL DATA


MODEL NO.	HX6
Lifting capacity	6.0T
Max. lifting height	2100mm
Min. height	380mm
Lifting time	Approx. 55S
Motor	3.5kWx2/3ph
Air supply	6-8bar
Platform width	750mm
Weight	5255kg
Electricity supply	According To Customer Needs

* Machine shown with optional equipment. Actual product appearance may differ.



HX6
LONG PLATFORM SCISSOR LIFT

- 6.0T lifting capacity.
- Infrared synchronization protection system.
- The great planeness of runways is perfect for high accuracy wheel aligning.
- Long slip plate and adjustable turntable positions accommodate different size of wheelbases.
- Pneumatic released safety locking system.
- 24V safe control system.
- Self-lubricated bushing and bearing.
- Safety descent alarming buzzer.
- Aluminum motor, no risks of overheating.
- It has been proofed by dynamic test with 115% of rated capacity and static test with 150% capacity.



Anti-abrasion Slider




LED Lighting System




Mechanical Safety Lock



Pneumatic Rear Side Slip



Wheel Free Lift (4000kg)



Long slip plate and adjustable turntable positions accommodate different size of wheelbases.